

Three-dimensional numerical simulation of discharge and flow related to airflow control using plasma actuator

Report Number: R21EACA16

Subject Category: JSS Inter-University Research

URL: <https://www.jss.jaxa.jp/en/ar/e2021/18107/>

● Responsible Representative

Naofumi Ohnishi, Professor, Tohoku University

● Contact Information

Naofumi Ohnishi(naohnishi@tohoku.ac.jp)

● Members

Naofumi Ohnishi, Shintaro Sato, Hideto Tamura

● Abstract

Plasma actuator has attracted attention as a fluid control device using dielectric barrier discharge. In the experimental study, it has been pointed out that the discharge has a spanwise distribution of the electrode and has a three-dimensional structure. In this study, we perform the three-dimensional numerical calculation of discharge and flow for verification of airflow control effect of plasma actuator.

● Reasons and benefits of using JAXA Supercomputer System

In the calculation of the discharge phenomenon, it is necessary to solve Poisson's equation at every time step, and it is solved using a convergence calculation, which calculation cost is high. In addition, since three-dimensional calculations are performed in this research, the required memory capacity is so large, and a supercomputer is necessary.

● Achievements of the Year

We conducted a three-dimensional calculation of the discharge process toward the coupled calculation of the discharge and the fluid. Previous research has pointed out that the electrodes of plasma actuators have protrusions of several tens of micrometers. We established a calculation method using general coordinate transformation to reproduce the protrusions of the electrodes, and the calculation was performed using a boundary-fitted mesh that fit the shape of the protrusion. As a result, we got a three-dimensional discharge morphology with the spanwise distribution of the electrodes (Fig.1). We will conduct coupled calculation of discharge and fluid in future work to investigate the effect of the three-dimensional discharge structure on the fluid field.

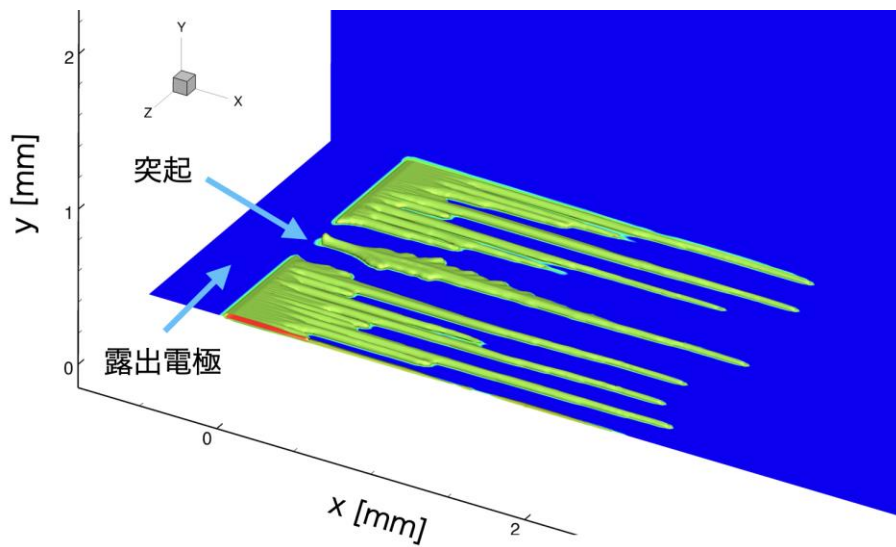


Fig. 1: The obtained three-dimensional discharge structure.

● **Publications**

- Oral Presentations

(1) H. Tamura, S. Sato, N. Ohnishi, Three-dimensional numerical simulation of branching structure in surface dielectric-barrier-discharge, 45th Conference of the institute of electrostatics Japan, Virtual, September 2021. (2) H. Tamura, S. Sato, N. Ohnishi, Three-dimensional numerical simulation of branching structure in surface dielectric-barrier-discharge, 74th Annual Gaseous Electronics Conference, Virtual GEC Platform, October 4-8, 2021.

● **Usage of JSS**

● **Computational Information**

Process Parallelization Methods	MPI
Thread Parallelization Methods	N/A
Number of Processes	8 - 720
Elapsed Time per Case	60 Hour(s)

● **JSS3 Resources Used**

Fraction of Usage in Total Resources*1(%): 0.02

Details

Computational Resources		
System Name	CPU Resources Used (core x hours)	Fraction of Usage*2(%)
TOKI-SORA	0.00	0.00
TOKI-ST	131,141.74	0.16
TOKI-GP	0.00	0.00
TOKI-XM	249.30	0.18
TOKI-LM	0.00	0.00
TOKI-TST	0.00	0.00
TOKI-TGP	0.00	0.00
TOKI-TLM	0.00	0.00

File System Resources		
File System Name	Storage Assigned (GiB)	Fraction of Usage*2(%)
/home	213.33	0.21
/data and /data2	40,960.00	0.44
/ssd	233.33	0.06

Archiver Resources		
Archiver Name	Storage Used (TiB)	Fraction of Usage*2(%)
J-SPACE	6.94	0.05

*1: Fraction of Usage in Total Resources: Weighted average of three resource types (Computing, File System, and Archiver).

*2: Fraction of Usage : Percentage of usage relative to each resource used in one year.

● **ISV Software Licenses Used**

ISV Software Licenses Resources		
	ISV Software Licenses Used (Hours)	Fraction of Usage*2(%)
ISV Software Licenses (Total)	0.00	0.00

*2: Fraction of Usage : Percentage of usage relative to each resource used in one year