

## Innovative Green Aircraft Technology (iGreen) : Riblet coating technology

Report Number: R24EDA101R01

Subject Category: Aeronautical Technology

URL: <https://www.jss.jaxa.jp/en/ar/e2024/27318/>

### ● Responsible Representative

Mitsuru Kurita, Aeronautical Technology Directorate, Aviation Environmental Sustainability Innovation Hub

### ● Contact Information

Mitsuru Kurita, Aeronautical Technology Directorate, Aviation Environmental Sustainability Innovation Hub(kurita.mitsuru@jaxa.jp)

### ● Members

Fumitake Kuroda, Mitsuru Kurita, Monami Sasamori

### ● Abstract

By developing a particular riblet pattern that is effective at reducing the turbulence frictional resistance, and by producing and applying an easy-to-coat method that can create an optimum riblet surface on the airframe, reduce friction drag in the turbulence boundary layer.

Ref. URL: <https://www.aero.jaxa.jp/eng/research/ecat/igreen/>

### ● Reasons and benefits of using JAXA Supercomputer System

CFD analysis is used for developing a particular riblet pattern that is effective at reducing the turbulence frictional resistance. Huge calculation resources and costs are required for the high fidelity and quick response CFD analysis for obtaining the optimum riblet pattern. Use of JSS is indispensable for these requirements; the cost and time on the CFD analysis are drastically saved .

### ● Achievements of the Year

We have performed a series of direct numerical simulations (DNS) of a turbulent channel flow over a blade-type riblet and analyzed the dependence of the riblet spacing and the Reynolds number in the drag reduction rate.

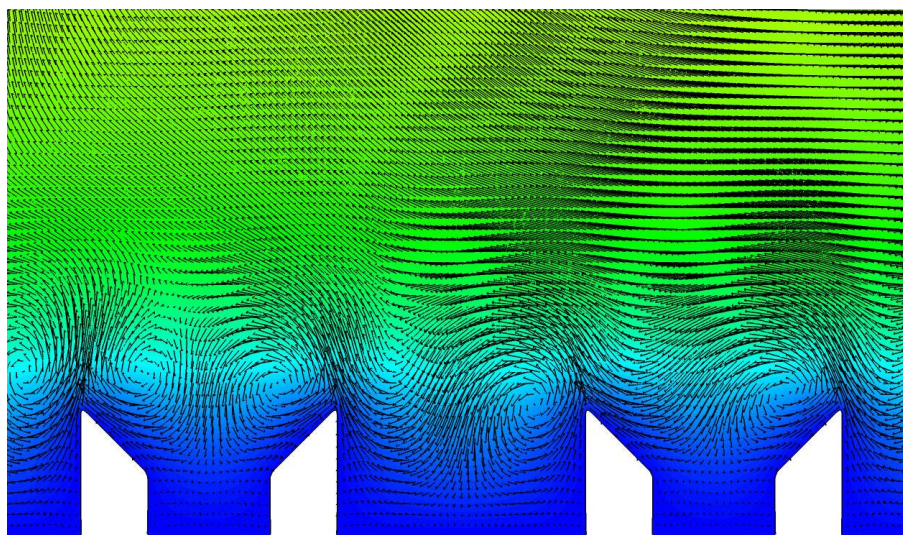


Fig. 1: Contours of the streamwise velocity together with the velocity vectors in the blade-type riblet DNS at  $Re_{\tau}=395$ .

## ● Publications

### - Oral Presentations

Mitsuru Kurita, Monami Sasamori, Hiroyuki Abe, Seigo Koga, Yoshimi Iijima, "Single Bevel Straight Riblet for Improvement of Skin-Friction Drag Reduction," Proceedings of the 62st Aircraft Symposium (AOSSA/Happiring, 15-17 October 2024), 2B12.

## ● Usage of JSS

### ● Computational Information

Process Parallelization Methods	MPI
Thread Parallelization Methods	Automatic Parallelization
Number of Processes	64 - 256
Elapsed Time per Case	300 Hour(s)

- **JSS3 Resources Used**

Fraction of Usage in Total Resources\*<sup>1</sup>(%): 4.02

Details

Computational Resources		
System Name	CPU Resources Used (core x hours)	Fraction of Usage* <sup>2</sup> (%)
TOKI-SORA	109,383,755.83	5.01
TOKI-ST	43,976.66	0.05
TOKI-GP	0.00	0.00
TOKI-XM	0.00	0.00
TOKI-LM	22,450.92	1.62
TOKI-TST	0.00	0.00
TOKI-TGP	0.00	0.00
TOKI-TLM	0.00	0.00

File System Resources		
File System Name	Storage Assigned (GiB)	Fraction of Usage* <sup>2</sup> (%)
/home	1.19	0.00
/data and /data2	64,849.37	0.31
/ssd	0.00	0.00

Archiver Resources		
Archiver Name	Storage Used (TiB)	Fraction of Usage* <sup>2</sup> (%)
J-SPACE	6.60	0.02

\*<sup>1</sup>: Fraction of Usage in Total Resources: Weighted average of three resource types (Computing, File System, and Archiver).

\*<sup>2</sup>: Fraction of Usage : Percentage of usage relative to each resource used in one year.

- **ISV Software Licenses Used**

ISV Software Licenses Resources		
	ISV Software Licenses Used (Hours)	Fraction of Usage <sup>*2</sup> (%)
ISV Software Licenses (Total)	1,262.53	0.86

<sup>\*2</sup>: Fraction of Usage : Percentage of usage relative to each resource used in one year.